


# AURA

## FR-W2303-72L

72" Ceiling Fan

# MODERN FORMS

## SMART FANS

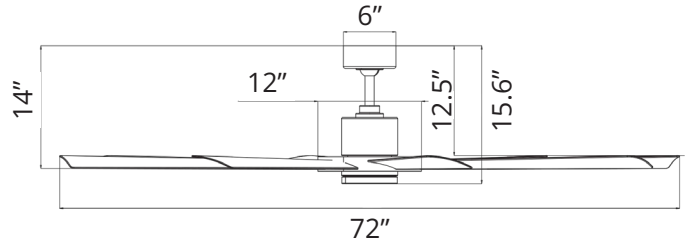

### PRODUCT DESCRIPTION

The sublime Aura Smart Ceiling Fan by Modern Forms defines the look and performance you desire in your bedroom, dining, or living area. A 72-inch sweep and a broad array of eight blades transport a swiftly moving surge of air across your room from an overhead silhouette with a cool cutting edge. Each blade is expertly engineered with a subtle curve to push a relaxed, comfortable breeze down over the room. Your remote control will commission one of its six speeds and drive the engine of comfort into your home.

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control
- Optional wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

### AIRFLOW/ENERGY EFFICIENCY

<b>Weighted-Average/High Airflow CFM:</b>	7188/9420
<b>Weighted-Average/High Energy Use (W):</b>	29/43
<b>Estimated Yearly Energy Cost (\$):</b>	8
<b>Weighted-Average/High Efficiency (CFM/W):</b>	250
<b>Max RPM:</b>	83

### ORDER NUMBER

Model	Housing	Blade
FR-W2303-72L	<b>MB</b> <i>Matte Black</i>	<b>MB</b> <i>Matte Black</i>
	<b>MB</b> <i>Matte Black</i>	<b>MB</b> <i>Brushed Nickel</i>
	<b>MB</b> <i>Matte Black</i>	<b>SB</b> <i>Soft Brass</i>
	<b>MW</b> <i>Matte White</i>	<b>SB</b> <i>Soft Brass</i>
	<b>BN</b> <i>Brushed Nickel</i>	<b>MW</b> <i>Matte White</i>

Example: FR-W2303-72L-SB/MB

**\*Results may vary based on application and surroundings.**  
**\*This fan comes uni-pack - blade select options are not available**

<sup>1</sup> MB and BN/MW are CCT - remaining finishes are transitioning through April of 2024. Contact factory for confirmation.

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760

### SPECIFICATIONS

<b>Construction:</b>	Aluminum, Steel, ABS
<b>Blade:</b>	16° Pitch, 72" sweep
<b>Downrod:</b>	.75"W x 6"H included
<b>Mounting Slope:</b>	Up to 30°
<b>Wire:</b>	80"
<b>Hanging Weight:</b>	33.5 lbs
<b>Total Power:</b>	63W
<b>Standards:</b>	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
<b>Motor Type:</b>	125 x 25 sensorless DC motor






### WIRELESS PERFORMANCE

<b>Wi-Fi Range:</b>	Up to 150 ft*
<b>Bluetooth Range:</b>	Up to 150 ft*

### LUMINAIRE PERFORMANCE

<b>Light Source:</b>	LED
<b>Light Wattage:</b>	19.5W
<b>Lumens/Delivered Lumens:</b>	1600/944
<b>Dimming:</b>	Integrated
<b>CRI:</b>	90
<b>CCT Color Temperature:</b>	3000K (2700K/4000K/5000K) selectable <sup>1</sup>
<b>Rated Life:</b>	50,000 hours

**OPTIONAL ACCESSORIES**

Bluetooth Wall Control		<b>F-WCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		<b>F-RCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		<b>XF-12</b> 12IN <b>XF-18</b> 18IN <b>XF-24</b> 24IN <b>XF-36</b> 36IN <b>XF-48</b> 48IN <b>XF-60</b> 60IN <b>XF-72</b> 72IN		All our downrods are .75 (in) I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		<b>XF-I</b>		Connects two downrods together.
Sloped Ceiling Kit		<b>XF-SCK</b>		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-GH**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

**SUGGESTED DOWNROD HEIGHT USAGE**

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

**SLOPED CEILING DEGREE CONVERSION CHART**

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire